



## Flexible and aseptic

### Radial Diaphragm Valve UltraPure

#### Concept

A highly flexible diaphragm valve built on a radial type system. Perfect for applications with high hygienic demands typically found in pharmaceutical, biotech, cosmetic and aseptic food industries. The radial diaphragm secures full drainability with superior Kv values and CIP functionality. The self draining design makes it functional in any angle offering full flexibility in installation.

#### Working principle

The valve can be remotely controlled by pneumatic actuator or manually by hand. The diaphragm can be changed in seconds without using any tools lowering maintenance costs significantly.

#### Standard Design

The Radial Valve UltraPure comes as pneumatic or manually operated in shut-off, pass-through or tank-outlet configurations. The diaphragms are available in Silicone and EPDM. The valve has welding or clamp ends as standard and are available in  $\varnothing 12,7\text{mm}$  and  $\varnothing 25,4$  and  $\varnothing 38$  dimensions.



#### TECHNICAL DATA

##### Pressure

Min. product pressure: . . . . . Full vacuum  
Max. product pressure: . . . . . 7 bar

Note: Tank outlet valve not prepared for build in pressure vessels according to PED/ASME.

##### Actuator function:

SA: . . . . . Pneumatic upward movement, spring return (NC)  
AA: . . . . . Pneumatic upward and downward movement  
Man: . . . . . Manually operated

##### Operating data: Pneumatic actuator (Spring operated) SA

Control air . . . . . Dry, free from particles and oil (ISO 8573.1 Class 2.2.1)  
Supply pressure, recommended . . . . . 6 bar  
Supply pressure minimum . . . . . 5,5 bar  
Supply pressure, maximum . . . . . 7 bar

##### Operating data - Pneumatic actuator (Air operated) AA

Control air . . . . . Dry, free from particles and oil (ISO 8573.1 Class 2.2.1)  
Supply pressure, recommended . . . . . 3,5 bar  
Supply pressure, minimum . . . . . 3 bar  
Supply pressure, maximum . . . . . 4 bar

##### Air consumption - Pneumatic actuators (AA & SA)

Air consumption RDV-UP 1/2" . . . . . 0.03 NI/stroke at 4 bar  
Air consumption RDV-UP 1" . . . . . 0.12 NI/stroke at 4 bar  
Air consumption RDV-UP 1 1/2" . . . . . 0.3 NI/stroke at 4 bar  
Air connection . . . . . M5 thread  
Hose, quick connection . . . . . 4mm hose

#### PHYSICAL DATA

##### Temperature

Max. working temperature . . . . . 135°C (max. 1 hour)  
Min. working temperature: . . . . . -10°C

##### Materials

Housing/valvebody) . . . . . AISI 316L (1.4404)  
Valve body/ends . . . . . AISI 316L (1.4435)  
Actuator cover . . . . . AISI 304 (1.4301)  
Diaphragm - Silicone . . . . . USP Class VI (FDA CFR 21 § 177.2600 and 3A)  
Diaphragm - EPDM . . . . . USP Class VI (FDA CFR 21 § 177.2600 and 3A)


##### Surface finish

Internally . . . . .  $R_a \leq 0,5 \mu\text{m}$  (SF1)  
Externally . . . . .  $R_a \leq 1,6 \mu\text{m}$

Options

- Surface finish internally (Ra < 0,4µm - electropolished SF4)
- Clamp with wingnut


Valve Body Combinations



Shut off valve (Welding ends)    Shut off valve  
Prepared for orbital                      (clamp ends)



Documentation

All valves are delivered with Alfa Laval Q-doc.



Tank outlet valves (welding ends)    Tank outlet valves  
- prepared orbital                              (clamp ends)

Pressure drop/capacity diagrams

Size (mm)	Valve open Kv at 1 bar (m³/h)	Valve closed Kv at 1 bar (m³/h)
12.7	2.0	2.5
25.4	10.5	14.0
38.1	26.0	36.0
		

$Q = Kv \times \sqrt{\Delta p}$

Where

Q = Flow in m³/h.

Kv = m³/h at a pressure drop of 1 bar (see table above).

Δ p = Pressure drop in bar over the valve.

Notel




For the diagrams the following applies:

Medium: Water (20°C)

Measurement: In accordance with VDI 2173





Pressure data for Radial Diaphragm Valve UltraPure

Table 1: Stop valve. The table shows the approx. static pressure (p) in bar without leakage at the valve seat.

Actuator/valve body combination and direction of pressure			Air pressure (bar)	Plug position	OD (12.7mm)	Valve size OD (25.4mm)	OD (38mm)
(Product pressure)		Spring closed (Air pressure)		NC	Min. 7	Min. 7	Min. 7
(Product pressure)		Air closed	Min. 3 Max. 4	Closed Closed	Min. 7 Min. 7	Min. 7 Min. 7	Min. 7 Min. 7
(Product pressure)		Manual		Closed	Min. 7	Min. 7	Min. 7

# Dimensions (mm)

Nominal size	Shut off valve						Tank Outlet Valve					
	Remote-controlled			Manually operated			Remote-controlled			Manually operated		
	DN/OD			DN/OD			DN/OD			DN/OD		
	1/2"	1"	1 1/2"	1/2"	1"	1 1/2"	1/2"	1"	1 1/2"	1/2"	1"	1 1/2"
	(12.7mm)	(25.4mm)	(38.0mm)	(12.7mm)	(25.4mm)	(38.0mm)	(12.7mm)	(25.4mm)	(38.0mm)	(12.7mm)	(25.4mm)	(38.0mm)
A1	103.0	146.0	160.0									
A2	106.5	151.5	172.0									
A3				86.0	122.0	133.0						
A4				89.5	130.5	143.0						
A5							102.0	146.0	161.0			
A6							105.5	151.5	173.0			
A7										84.0	122.0	134.0
A8										87.5	130.5	144.0
A9							150.0	200.0	220.0	110.0	130.0	150.0
OD	12.7	25.4	38.1	12.7	25.4	38.1	12.7	25.4	38.1	12.7	25.4	38.1
ID	9.5	22.2	34.9	9.5	22.2	34.9	9.5	22.2	34.9	9.5	22.2	34.9
t	1.65	1.65	1.65	1.65	1.65	1.65	1.65	1.65	1.65	1.65	1.65	1.65
E1	19.2	32.0	37.5	19.2	32.0	37.5						
E2 (Welding end)	52.0	65.0	65.0	52.0	65.0	65.0	52.0	65.0	65.0	52.0	65.0	65.0
E2 (clamp end)	53.0	64.5	64.5	53.0	64.5	64.5						
E3							17.7	31.8	38.3	17.7	31.8	38.3
E4							47.0	96.0	158.5	47.0	96.0	158.5
E5							20.8	62.0	97.3	20.8	62.0	97.3
F1	3.5	5.5	12.0				3.5	5.5	12.0			
F2				3.5	8.5	10.0				3.5	8.5	10.0
H1	42.0	77.5	94.5				42.0	77.5	94.5			
H2				55.0	63.0	63.0				55.0	63.0	63.0
øD							50.0	79.0	85.0	50.0	79.0	85.0
G							3.0	6.0	8.0	3.0	6.0	8.0
Weight (kg)	0.9	3.0	4.0	1.0	2.2	2.1	1.1	3.4	4.5	1.0	2.6	2.6

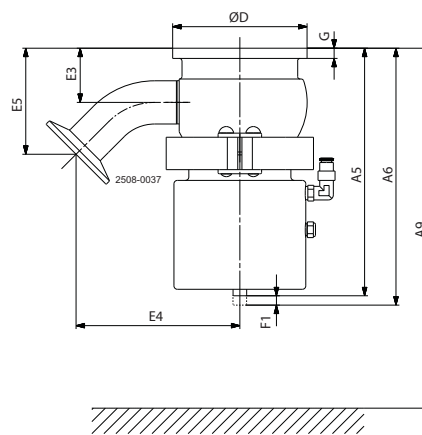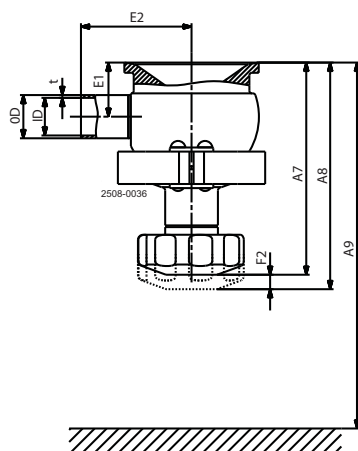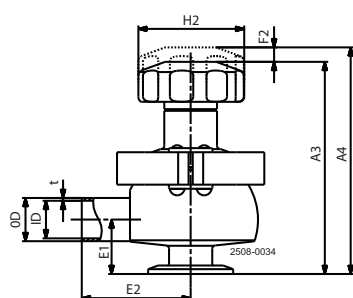

**Note!**  
For further details, see also ESE02132

---

**How to contact Alfa Laval**

Contact details for all countries are continually updated on our website. Please visit [www.alfalaval.com](http://www.alfalaval.com) to access the information direct.