



The Proven Mixproof Range

SMP-BCA Mixproof Valve with PTFE Diaphragm

Concept

SMP-BCA is an aseptic double seat valve with PTFE diaphragm. It is available as a stop- or divert valve.

The valve is suited for aseptic operating conditions such as high sterilisation temperatures.

SMP-BCA is specially designed for aseptic applications with the highest hygienic demands.

Working principle

SMP-BCA is operated by means of compressed air. The valve is a normally closed (NC) valve.

Sterile stem sealing towards the atmosphere is ensured by a special designed PTFE/rubber diaphragm unit. The PTFE diaphragm does not allow product residues to build up on the product contact surface.

The product lines are separated by two sealings and a sterile barrier chamber to avoid mixing of product and to ensure immediate indication in case of a leak from one of the plug seals. Two small pneumatic normally open (NO) valves control flow to and from the sterile barrier chamber. The barrier chamber must be clean and sterile when the main valve is closed.

The lower product lines on change over valves are separated by a single seal plug, without sterile barrier chamber.



TECHNICAL DATA

Pressure range: 0-800 kPa (0-8 bar).
 Temperature range: -10°C to 140°C (EPDM).
 Optimum process conditions: >50 kPa (0.5 bar), >20°C.
 Max. sterilization temperature (steam - short time) 150°C - 380 kPa (3.8 bar).
 Air pressure: 500-800 kPa (5-8 bar).


Note!

Vacuum is not recommended in aseptic applications.

PHYSICAL DATA

Product wetted steel parts: 1.4404 (316L).
 External surface finish Semi-bright (blasted)
 Internal surface finish Bright (polished), Ra < 1.6 µm
 Other steel parts: 1.4301 (304).
 Product wetted seals: EPDM and PTFE.
 Other seals: NBR, EPDM.

Valve body combination

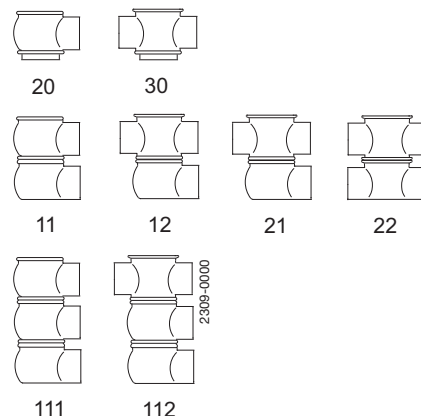

Type 20 and 30 body versions are on request available in following configurations:

- Tee welded on lower port in 0 or 90 deg. version
- Bend welded on lower port in 0, 90, 180 or 270 deg. version

The three body version is on request available in following configurations:

- Type 121, 122, 211, 212, 221 & 222

Standard design

SMP-BCA is based on the SMP-BC valve design. It consists of actuator, bonnet, stem with diaphragm unit and valve bodies. The divert version is a three body design.

The valve is assembled by means of clamp rings and a stem clip system for easy maintenance.

Options

- A. Male parts or clamp ends in accordance with required standard.
- B. Control and Indication: IndiTop, ThinkTop or ThinkTop Basic.
- C. Larger actuator for valve sizes 38-51 mm/DN 40-50.
- D. CIP installation kits.
- E. Other valve body combinations.
- F. Surface roughness, product wetted parts: $Ra \leq 0.8 \mu m$.
- G. Product wetted seals of NBR and PTFE or FPM and PTFE.
- H. Service tool for actuator.
- I. Tool for plug seals (Necessary for changing the seals).

Note!

For further details, see also PD 65036 and instruction IM 70811.

Air consumption (litres free air)		
Size	38 mm, 51 mm/DN40,50 Actuator $\varnothing 89$	63.5, 76.1, 101.6 mm/DN 65, 80, 100 Actuator $\varnothing 133$
Stop valve/Divert valve	0.2 x Air pressure (bar)	0.7 x Air pressure (bar)

Expected lifetime of diaphragm unit under normal conditions:




(no pressure shocks or cavitation).

Size/Type	Stop valve activations	Divert valve activations
38mm/DN40	12.000	10.000
51mm/DN50	12.000	10.000
63.5mm/DN65	12.000	5.000
76.1mm/DN80	5.000	5.000
101.6mm/DN100	5.000	5.000


Note! Activating the valve without internal product pressure reduces lifetime of diaphragm unit.

Pressure drop/capacity diagrams





Stop valve:

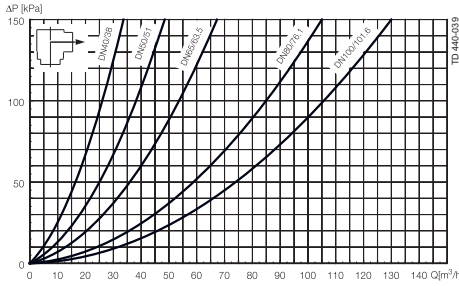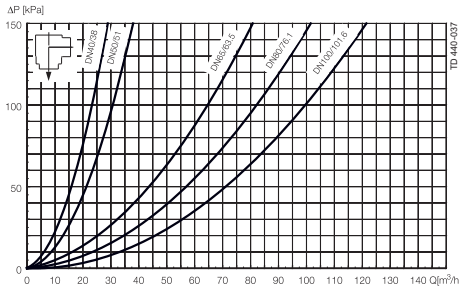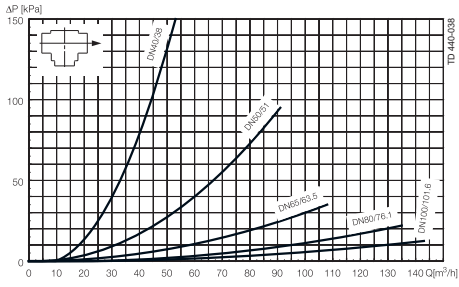

CIP chamber:

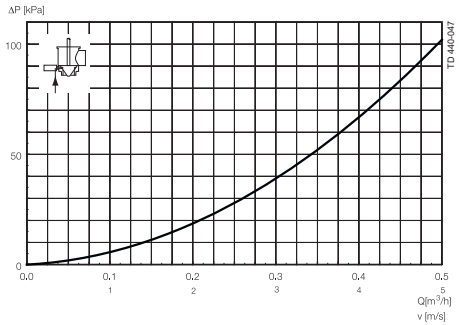

Divert valve:

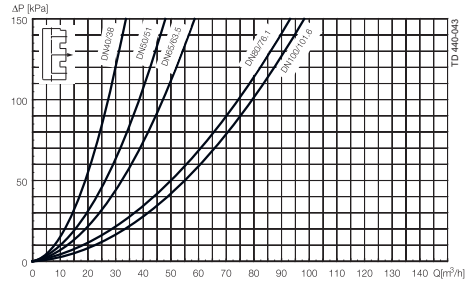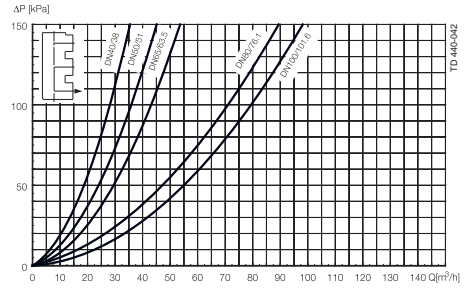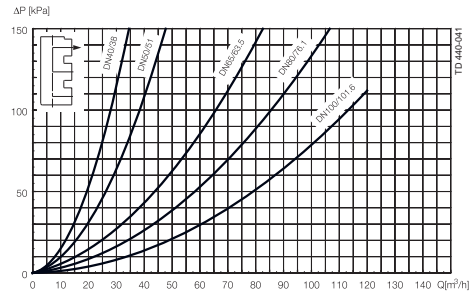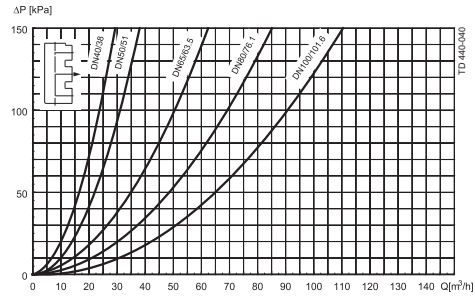


NOTE! For the diagrams the following applies:

Medium: Water (20°C).

Measurement: In accordance with VDI 2173.


Pressure data for SMP-BCA

1. Upper plug. Max. product pressure P_1 without leakage due to pressure shocks, as a function of support air pressure.


Direction of pressure	Valve size	Actuator size	Spring type	Support air pressure (bar)				
				0	3	5	6	7
	38mm/ DN40	ø89	Normal	6.0	16.0	22.5	26.2	29.5
			Strong	9.6	19.5	26.3	30.0	30.0
		ø133	Normal	16.0	30.0	30.0	30.0	30.0
			Strong	22.0	30.0	30.0	30.0	30.0
	51mm/ DN50	ø89	Normal	6.0	16.0	22.5	26.2	29.5
			Strong	9.6	19.5	26.3	30.0	30.0
		ø133	Normal	16.0	30.0	30.0	30.0	30.0
			Strong	22.0	30.0	30.0	30.0	30.0
	63.5mm/ DN65	ø133	Normal	9.6	25.5	30.0	30.0	30.0
			Strong	16.0	30.0	30.0	30.0	30.0
		76.1mm/ DN80	Normal	6.5	14.5	19.5	22.4	26.8
			Strong	9.2	17.5	23.5	26.2	29.5
101.6mm/ DN100	ø133	Normal	4.0	11.0	16.0	18.4	20.6	
		Strong	6.5	14.4	19.6	22.2	25.0	

F1 = Spring + support Air

2. Upper plug. Max. product pressure P_2 against which the valve can open, as a function of air pressure.

Direction of pressure	Valve size	Actuator size	Spring type	Support air pressure (bar)				
				3	4	5	6	7
	38mm/ DN40	ø89	Normal	8.0	8.0	8.0	8.0	8.0
			Strong	-	8.0	8.0	8.0	8.0
		ø133	Normal	8.0	8.0	8.0	8.0	8.0
			Strong	-	8.0	8.0	8.0	8.0
	51mm/ DN50	ø89	Normal	8.0	8.0	8.0	8.0	8.0
			Strong	-	8.0	8.0	8.0	8.0
		ø133	Normal	8.0	8.0	8.0	8.0	8.0
			Strong	-	8.0	8.0	8.0	8.0
	63.5mm/ DN65	ø133	Normal	4.0	8.0	8.0	8.0	8.0
			Strong	-	1.4	8.0	8.0	8.0
		76.1mm/ DN80	Normal	2.8	7.0	8.0	8.0	8.0
			Strong	-	2.0	5.4	8.0	8.0
	101.6mm/ DN100	ø133	Normal	2.2	4.6	7.2	8.0	8.0
			Strong	-	1.6	4.2	6.6	8.0

3. Upper valve. Max. product pressure P_3 in upper valve body at which the valve can close.


Direction of pressure	Valve size	Actuator size, spring type			
		ø89, Normal	ø89, Strong	ø133, Normal	ø133, Strong
	38mm/DN40	2.7	4.5	8.0	8.0
	51mm/DN50	2.4	4.0	6.0	8.0
	63.5mm/DN65	-	-	7.0	8.0
	76.1mm/DN80	-	-	7.0	8.0
	101.6mm/DN100	-	-	5.0	8.0

F2 = Air - spring

F3 = Spring


Pressure data for SMP-BCA

4. Lower valve, change-over. Max. product pressure P_4 without leakage, as a function of air pressure.

Direction of pressure	Valve size	Actuator size	Spring size	Air pressure (bar)				
				3	4	5	6	7
	38mm/ DN40	ø89 ø89	Normal Strong	* *	8.0 *	8.0 8.0	8.0 8.0	8.0 8.0
		ø133 ø133	Normal Strong	8.6 *	8.0 *	8.0 8.0	8.0 8.0	8.0 8.0
	51mm/ DN50	ø89 ø89	Normal Strong	* *	8.0 8.0	8.0 8.0	8.0 8.0	8.0 8.0
		ø133 ø133	Normal Strong	8.6 *	8.0 *	8.0 8.0	8.0 8.0	8.0 8.0
	63.5mm/ DN65	ø133 ø133	Normal Strong	3.4 *	8.0 *	8.0 8.0	8.0 8.0	8.0 8.0
	76.1mm/ DN80	ø133 ø133	Normal Strong	* *	7.6 *	8.0 5.6	8.0 8.0	8.0 8.0
	101.6mm/ DN100	ø133 ø133	Normal Strong	* *	4.6 *	9.2 3.8	8.0 7.2	8.0 8.0

* = Valve cannot close




5. Upper valve. Max. CIP pressure P_{CIP} without leakage to product area as a function of product pressure below plug.

Direction of pressure	Valve size	Actuator size	Spring size	Product pressure P_5 below plug (bar)				
				0	2	4	6	7
	38mm/ DN40	ø89 ø89	Normal Strong	9.0 10.0	6.3 9.9	3.5 7.2	0.8 4.6	- 2.0
		ø133 ø133	Normal Strong	10.0 10.0	10.0 10.0	10.0 10.0	10.0 10.0	10.0 10.0
	51mm/ DN50	ø89 ø89	Normal Strong	9.0 10.0	6.3 9.6	3.5 6.7	0.8 3.8	- 1.0
		ø133 ø133	Normal Strong	10.0 10.0	10.0 10.0	10.0 10.0	10.0 10.0	10.0 10.0
	63.5mm/ DN65	ø133 ø133	Normal Strong	10.0 10.0	10.0 10.0	9.3 10.0	5.8 10.0	2.5 10.0
	76.1mm/ DN80	ø133 ø133	Normal Strong	10.0 10.0	10.0 6.8	8.5 2.3	4.7 -	1.0 -
	101.6mm/ DN100	ø133 ø133	Normal Strong	10.0 10.0	6.0 10.0	- 6.5	- 1.4	- -

F2 = Air - spring

F3 = Spring

NOTE! Max. recommended CIP pressure = 100 kPa (1 bar).

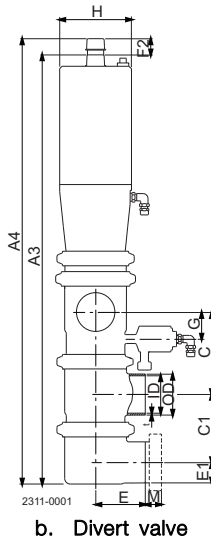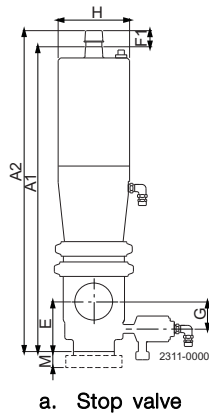

1) CIP valve - 2) Detecting valve

Dimensions (mm)

Size	38 mm	51 mm	63.5 mm	76.1 mm	101.6 mm	40 DN	50 DN	65 DN	80 DN	100 DN
A ₁	371	381	459	481	553	369	379	456	482	552
A ₂	385	395	473	501	573	383	393	470	502	572
A ₃	511	532	642	677	778	511	532	642	693	778
A ₄	525	546	662	697	798	525	546	662	713	798
C	90	102	124	129	157	90	102	124	134	157
C ₁	80	84	108	115	150	80	84	108	120.5	150
OD	38	50.8	63.5	76.1	101.6	41	53	70	85	104
ID	34.9	47.6	60.3	72.1	97.6	38	50	66	81	100
t	1.6	1.6	1.6	2.0	2.0	1.5	1.5	2.0	2.0	2.0
E	49.5	61.5	82.3	87.3	133.5	49.5	61.5	82.3	87.3	133.5
E ₁	20.5	26.8	33.2	39.1	51.8	22	28	36	43.5	53
F ₁	14	14	14	20	20	14	14	14	20	20
F ₂	14	14	20	20	20	14	14	20	20	20
G	27	33.3	39.7	45.6	58.3	28.5	34.5	42.5	50	59.5
H	89	89	89	133	133	89	89	89	133	133
J	46.7	46.7	57	66.6	84.3	46.7	46.7	57	66.6	84.3
K	63	63	63	63	63	63	63	63	63	63
M/ISO	clamp	21	21	21	21					
M/ISO	male	21	21	21	21					
M/DIN	male				22	23	25	25	30	
M/SMS	male		20	20	24	24	35			
M/BS	male	22	22	22	22	27				
Weight (kg):	Stop valve	6.5	6.8	13.3	14.9	18.2	6.5	6.8	13.3	15.6
	Divert valve	8.2	8.6	15.5	18.6	24.6	8.2	8.6	15.5	19.6

Air Connections Compressed air:
R 1/8" (BSP), internal thread.

CIP connection:
R 3/8" (BSP), external thread.

Leakage connection:
R 3/8" (BSP), external thread.

Caution, opening/closing time:

Opening/closing time will be affected by the following:

- The air supply (air pressure).
- The length and dimensions of the air hoses.
- Number of valves connected to the same air hose.
- Use of single solenoid valve for serial connected air actuator functions.
- Product pressure.

Alfa Laval reserves the right to change specifications without prior notification. ALFA LAVAL is a trademark registered and owned by Alfa Laval Corporate AB.

ESE00282EN 1201

© Alfa Laval

How to contact Alfa Laval

Contact details for all countries are continually updated on our website. Please visit www.alfalaval.com to access the information direct.