



# Simply Unique Single Seat

Unique SSV Standard

## Concept

Unique SSV meets the highest demands of your process in terms of hygiene and safety. It is built on a well-proven platform from an installed base of more than one million valves.

## Working principle

The valve is a pneumatic seat valve in a hygienic and modular design for a wide field of duties, e.g. as a shut-off valve with two (2) or three (3) ports or as a change-over valve with three (3) to five (5) ports. The valve is remote-controlled by means of compressed air. It has few and simple moveable parts which results in a very reliable valve and low maintenance cost.

## Standard design

The Unique Single Seat Standard valve comes in a one or two body configuration. To ensure a high degree of flexibility the valve seat between the two bodies in the Change-over version is loose. The valve features an optimized life span of the seals through a defined compression design. The actuator is connected to the valve body using a yoke and all components are assembled with clamp rings.



## TECHNICAL DATA


### Temperature

Temperature range . . . . . -10°C to +140°C (EPDM)

### Pressure

Max. product pressure . . . . . 1000 kPa (10 bar)  
 Min. product pressure . . . . . Full vacuum  
 Air pressure . . . . . 500 to 700 kPa (5 to 7 bar)

### Valve Body Combinations

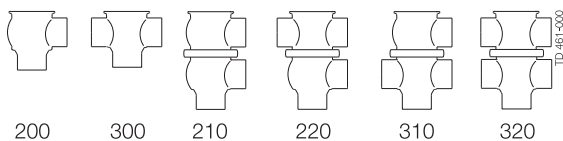

### Actuator function

- Pneumatic downward movement, spring return.
- Pneumatic upward movement, spring return.
- Pneumatic upward and downward movement (A/A).

## PHYSICAL DATA

### Materials

Product wetted steel parts: . . . . . 1.4404 (316L)  
 Other steel parts . . . . . 1.4301 (304)  
 External surface finish . . . . . Semi-bright (blasted)  
 Internal surface finish . . . . . Bright (polished), Ra < 0.8 µm  
 Product wetted seals: . . . . . EPDM  
 Other seals . . . . . NBR

### Options

- A. Male parts or clamp liners in accordance with required standard.
- B. Control and Indication: IndiTop, ThinkTop or ThinkTop Basic.
- C. Product wetted seals in HNBR or FPM.
- D. Plug seals HNBR, FPM or TR2 plug (floating PTFE design).
- E. External surface finish bright.

### Note!

For further details, see instruction ESE00202.

### Other valves in the same basic design

The Unique SSV valve range includes several purpose built valves.

### Dimensions (mm)

Nominal size	Inch tubes						DIN tubes					
	DN/OD						DN					
	25	38	51	63.5	76.1	101.6	25	40	50	65	80	100
A <sub>1</sub> <sup>1)</sup>	313	314	363	389	422	467	315	315	365	389	427	470
A <sub>2</sub> <sup>1)</sup>	328	334	388	414	452	497	330	335	390	414	457	500
A <sub>3</sub> <sup>1)</sup>	360*	374	436	475	521	591	367*	379	440.6	481	534	596
A <sub>4</sub> <sup>1)</sup>	372*	391	458	497	548	618	379*	396	463	503	561	623
C	47.8	60.8	73.8	86.3	98.9	123.6	52	64	76	92	107	126
OD	25	38	51	63.5	76.1	101.6	29	41	53	70	85	104
ID	21.8	34.8	47.8	60.3	72.9	97.6	26	38	50	66	81	100
t	1.6	1.6	1.6	1.6	1.6	2	1.5	1.5	1.5	2	2	2
E	50	49.5	61	81	86	119	50	49.5	62	78	87	120
F <sub>1</sub>	15	20	25	25	30	30	15	20	25	25	30	30
F <sub>2</sub>	12*	17	22	22	27	27	12*	17	22	22	27	27
H	85	85	Ø115	Ø115	Ø157	Ø157	85	85	Ø115	Ø115	Ø157	Ø157
H (high pressure)	85	Ø115	Ø155	Ø155	Ø155	Ø155	85	Ø115	Ø155	Ø155	Ø155	Ø155
M (ISO clamp)	21	21	21	21	21	21	-	-	-	-	-	-
M (DIN clamp)	-	-	-	-	-	-	21	21	21	28	28	28
M (DIN male)	-	-	-	-	-	-	22	22	23	25	25	30
M (SMS male)	20	20	20	24	24	35	-	-	-	-	-	-
<b>Weight (kg)</b>												
Shut-off valve	3.1	3.3	5.5	6.5	11.3	13.6	3.2	3.4	5.5	6.6	11.8	13.6
Change-over valve	3.9	4.2	7.1	8.5	14	18	4.1	4.5	7.2	8.8	14.9	17.9


\* = only available with replaceable elastomer plug seal.

<sup>1)</sup> For exact A<sub>1</sub> - A<sub>4</sub> dimensions, please refer to information in CAS.


Below are some of the valve models available, though please use the Alfa Laval computer aided selection tool (CAS) for full access to all models and options.

- Reverse acting valve.
- Long stroke valve.
- Manually operated valve.
- Tank Outlet valve.
- Two Step valve.
- Tangential valve.


The actuator comes with a 5 years warranty

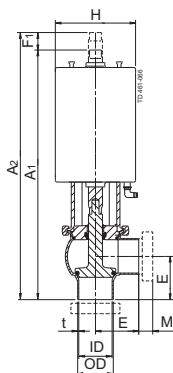

Shut-off valve

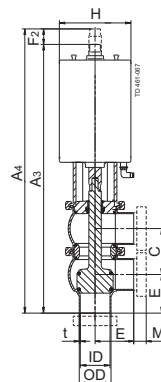

Change-over valve



PTFE plug seal (TR2)

### Please note!

Opening/closing time will be effected by the following:







- The air supply (air pressure).
- The length and dimensions of the air hoses.
- Number of valves connected to the same air hose.
- Use of single solenoid valve for serial connected air actuator functions.
- Product pressure.

### Air Connections Compressed air:

R 1/8" (BSP), internal thread.

Size	Air consumption (litres free air) for one stroke		
	DN25-40	DN50-65	DN80-100
	DN/OD 25-38 mm	DN/OD 51-63.5 mm	DN/OD 76.1-101.6 mm
NO and NC	0.2 x air pressure [bar]	0.5 x air pressure [bar]	1.3 x air pressure [bar]
A/A	0.5 x air pressure [bar]	1.1 x air pressure [bar]	2.7 x air pressure [bar]

## Pressure drop/capacity diagrams

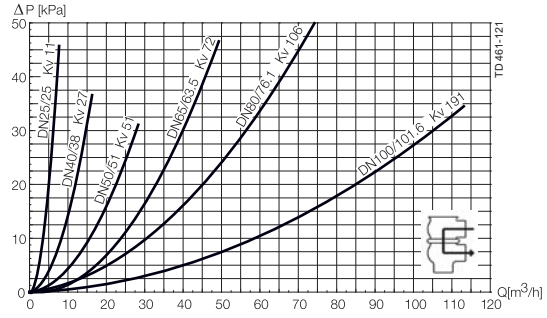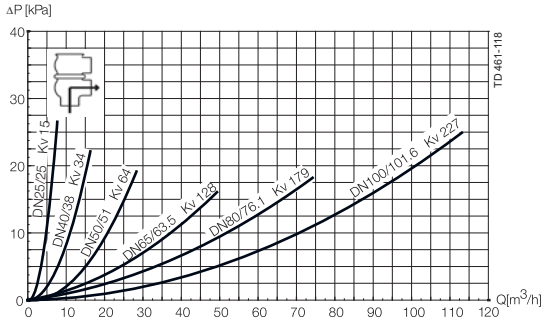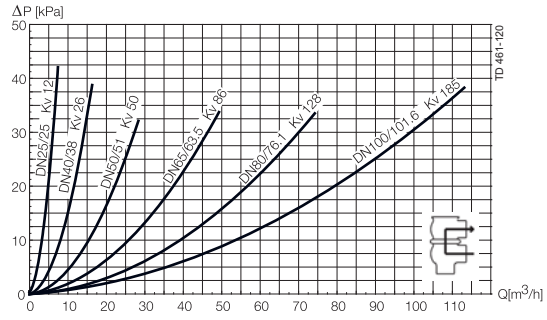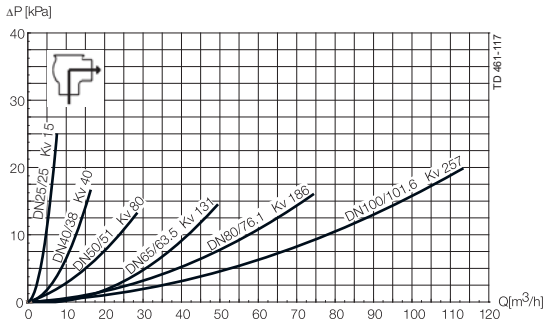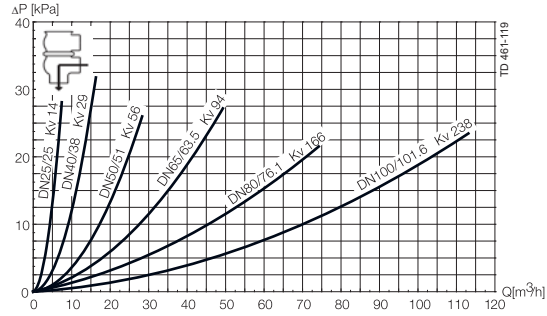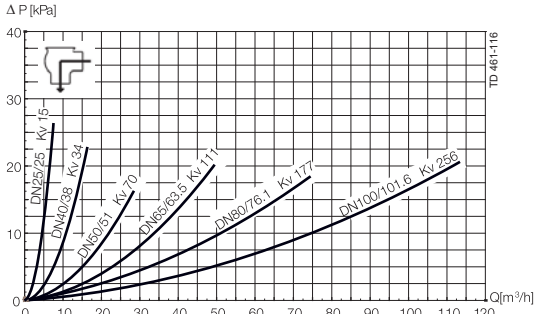

### Note!

For the diagrams the following applies:

Medium: Water (20°C)

Measurement: In accordance with VDI2173

Pressure drop can also be calculated in CAS.

Pressure drop can also be calculated with the following formula:

$$Q = K_v \times \sqrt{\Delta p}$$

Where

Q = Flow in m<sup>3</sup>/h.

Kv = m<sup>3</sup>/h at a pressure drop of 1 bar (see table above).

Δ p = Pressure drop in bar over the valve.

How to calculate the pressure drop for an ISO 2.5" shut-off valve if the flow is 40 m<sup>3</sup>/h

2.5" shut-off valve, where Kv = 111 (See table above).

$$Q = K_v \times \sqrt{\Delta p}$$

$$40 = 111 \times \sqrt{\Delta p}$$

$$\Delta p = \left(\frac{40}{111}\right)^2 = 0.13 \text{ bar}$$

(This is approx. the same pressure drop by reading the y-axis above)

Pressure data for Unique Single Seat Valve standard

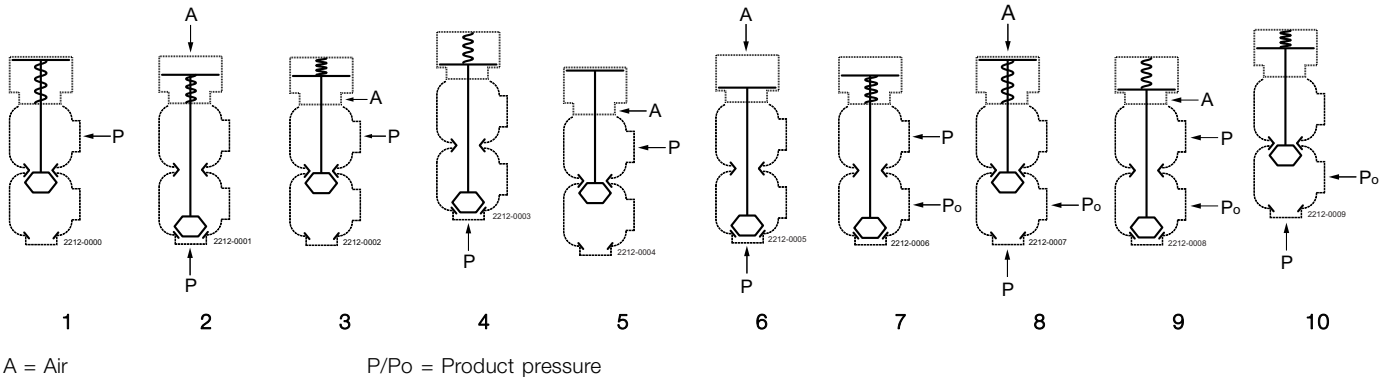


Table 1 - Shut-off and Change-over valves

Max. pressure in bar without leakage at the valve seat

Actuator / Valve body combination and direction of pressure	Air pressure (bar)	Plug position	Valve size					
			DN 25 DN/OD	DN 40 DN/OD	DN50 DN/OD	DN 65 DN/OD	DN 80 DN/OD	DN 100 DN/OD
			25 mm	38 mm	51 mm	63.5 mm	76.1 mm	101.6 mm
1		NO	10.0	8.2	8.4	4.5	6.8	4.4
	5		9.2	4.4	5.9	3.4	4.4	2.9
2	6	NO	10.0	7.6	9.6	5.6	7.2	4.8
	7		10.0	10.0	10.0	7.8	10.0	6.7
3	5		10.0	5.7	6.8	3.7	4.7	3.0
	6	NC	10.0	9.8	10.0	6.1	7.7	5.0
4	7		10.0	10.0	10.0	8.5	10.0	6.9
		NC	10.0	6.3	7.2	4.2	6.4	4.2
5	5		10.0	10.0	10.0	10.0	10.0	9.4
	6	A/A	10.0	10.0	10.0	10.0	10.0	10.0
	7		10.0	10.0	10.0	10.0	10.0	10.0
6	5		10.0	10.0	10.0	10.0	10.0	9.1
	6	A/A	10.0	10.0	10.0	10.0	10.0	10.0
	7		10.0	10.0	10.0	10.0	10.0	10.0

Table 2 - Shut-off and Change-over valves

Max. pressure in bar against which the valve can open

Actuator / Valve body combination and direction of pressure	Air pressure (bar)	Plug position	Valve size					
			DN 25 DN/OD	DN 40 DN/OD	DN50 DN/OD	DN 65 DN/OD	DN 80 DN/OD	DN 100 DN/OD
			25 mm	38 mm	51 mm	63.5 mm	76.1 mm	101.6 mm
7		NO	10.0	10.0	10.0	7.4	9.7	6.3
	5		10.0	7.8	10.0	6.1	7.1	4.7
8	6	NO	10.0	10.0	10.0	8.3	9.9	6.6
	7		10.0	10.0	10.0	10.0	10.0	8.5
9	5		10.0	10.0	10.0	6.6	7.5	4.9
	6	NC	10.0	10.0	10.0	9.0	10.0	6.9
10	7		10.0	10.0	10.0	10.0	10.0	8.8
		NC	10.0	9.7	10.0	6.8	9.1	6.1

Table 3 - Shut-off and Change-over valves with high pressure actuator option

Max. pressure in bar without leakage at the valve seat

Actuator / Valve body combination and direction of pressure	Air pressure (bar)	Plug position	Valve size					
			DN 25 DN/OD	DN 40 DN/OD	DN50 DN/OD	DN 65 DN/OD	DN 80 DN/OD	DN 100 DN/OD
			25 mm	38 mm	51 mm	63.5 mm	76.1 mm	101.6 mm
1		NO	10.0	10.0	10.0	10.0	-	-
2	6	NO	10.0	10.0	10.0	10.0	-	-
3	6	NC	10.0	10.0	10.0	10.0	5.0	3.0
4		NC	10.0	10.0	10.0	9.6	10.0	7.0





Alfa Laval reserves the right to change specifications without prior notification. ALFA LAVAL is a trademark registered and owned by Alfa Laval Corporate AB.

ESE00172EN 1201

© Alfa Laval

---

**How to contact Alfa Laval**

Contact details for all countries are continually updated on our website. Please visit [www.alfalaval.com](http://www.alfalaval.com) to access the information direct.