



Simply Unique Single Seat

Unique SSV Manually Operated/Manually Regulating

General Information

The new generation that meets the highest demands of your process in terms of hygiene and safety. Unique Single Seat Valves are built on a well-proven, platform from an installed base of more than one million valves.

Application

The sanitary and modular design of the manual operated Unique Single Seat Valve can be used in a wide range of applications, e.g. as a Shut-off valve with two (2) or three (3) ports or as a Change-over valve with three (3) to five (5) ports.

The manual regulated Unique Single Seat Valve is a regulating valve used for manual control of pressure and flow.

Working principle

The valves permit gradual opening and the few and simple moving parts result in very reliable valves easy to dismantle. The plug can be fixed in the adjusted position with a lock screw. The valve is based on the modular platform of the Unique Single Seat Valve.

Standard Design

The manual operated valve can easily be converted to a pneumatic operated valve by replacing the crank mechanism with an Unique Single Seat Valve actuator. The other parts are identical.

The Unique Single Seat Manual Valve range cover the sizes from DN50 to DN100 and DN/OD 51 mm to 101.6 mm.

Other valves in the same basic design

The Unique SSV valve range includes several purpose built valves. Below listed are some of the valve models available, though please use the Alfa Laval computer aided selection tool (CAS) for full access to all models and options.

- Standard valve.
- Reverse acting valve.
- Aseptic valve.
- Long Stroke valve.
- Tank Outlet valve.

Unique Single Seat Valve - Manually Operated and Manually Regulating Valves is designed, tested and approved according to EHEDG guidelines.



Single Seat Valve Manually Regulating and Manually Operated Valve




Manually Operated Valve

Pressure drop/capacity diagrams:

The same as Unique Single Seat Valve.


Valve body combinations

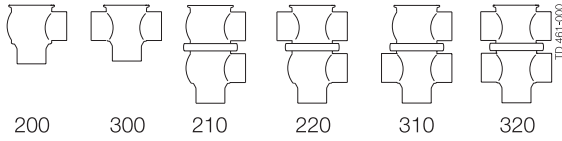


Dimensions

Dimensions (mm) - Unique Manually Operated Valves


Size	25 mm	38 mm	51 mm	63.5 mm	76.1 mm	101.6 mm	DN 25	DN 40	DN 50	DN 65	DN 80	DN 100
A ₁	245	245	259	285	291	337	247	247	260	284	295	338
A ₂	260	265	284	310	321	367	262	267	285	309	325	368
A ₃	291	307	332	371	390	460	297	312	336	376	402	464
A ₄	303	324	354	393	417	487	309	329	358	398	429	491
C	47.8	60.8	73.8	86.3	98.9	123.6	52	64	76	92	107	126
OD	25	38	51	63.5	76.1	101.6	29	41	53	70	85	104
ID	21.8	34.8	47.8	60.3	72.9	97.6	26	38	50	66	81	100
t	1.6	1.6	1.6	1.6	1.6	2	1.5	1.5	1.5	2	2	2
E ₁	50	49.5	62	82	87	120	50	49.5	62	78	87	120
E ₂	50	49.5	62	82	87	120	50	49.5	62	78	87	120
F ₁	15	20	25	25	30	30	15	20	25	25	30	30
F ₂	12	17	22	22	27	27	12	17	22	22	27	27
H	105	105	105	105	105	105	105	105	105	105	105	105
M/ISO clamp	21	21	21	21	21	21	-	-	-	-	-	-
M/DIN clamp	-	-	-	-	-	-	21	21	21	28	28	28
M/DIN male	-	-	-	-	-	-	22	22	23	25	25	30
M/SMS male	20	20	20	24	24	35	-	-	-	-	-	-
Weight (kg)												
Shut off valve	1.8	2.0	2.6	3.6	4.6	7.0	1.9	2.1	2.5	3.7	5.0	6.9
Change-over valve	2.6	3.0	4.2	5.6	7.3	11.4	2.8	3.2	4.2	5.9	8.2	11.2



a. Shut off valve.

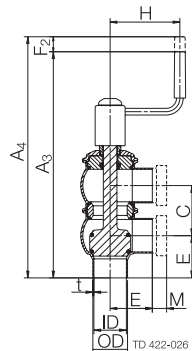

b. Change-over valve.



PTFE plug seal (TR2)

Fig. 2. Dimensions.

Manually Regulating Valve

Kv-Factors

Valve size	Kv
38mm/DN40	14*/44
51mm/DN50	75
63.5mm/DN65	113
76.1mm/DN80	171
101.6mm/DN100	250

* optional

Kv = m³/h at a pressure drop of 1 bar.

For other pressure drops than 1 bar the flow can be calculated with the following formula:

$$Q = Kv \times \sqrt{\Delta p}$$

Where

Q = Flow in m³/h.

Kv = See above.

Δp = Pressure drop in bar over the valve.

Example:

Plug Kv 75

Q to be calculated at $\Delta p = 2$ bar:

$$Q = 75 \times \sqrt{2} = 106 \text{ m}^3/\text{h}$$

or at 50% stroke:

$$Q = 0.5 \times 75 \times \sqrt{2} = 53 \text{ m}^3/\text{h}$$

Pressure drop/capacity diagram:

The plugs have linear characteristics. This means that a certain amount of throttling, by reducing the stroke, results in a proportional reduction of the flow if the pressure drop remains unchanged.




Fig. 3. The flow in % of the total flow at a pressure drop of 1 bar.

Dimensions (mm) - Unique Manually Regulating Valve

Size	38 mm	51 mm	63.5 mm	76.1 mm	101.6 mm	DN 40	DN 50	DN 65	DN 80	DN 100
A ₁	176	190	216	222	268	178	191	215	226	269
A ₂	196	215	241	252	298	198	216	240	256	299
OD	38	51	63.5	76.1	101.6	41	53	70	85	104
ID	34.8	47.8	60.3	72.9	97.6	38	50	66	81	100
t	1.6	1.6	1.6	1.6	2	1.5	1.5	2	2	2
E ₁	49.5	62	82	87	120	49.5	62	78	87	120
E ₂	49.5	62	82	87	120	49.5	62	78	87	120
F ₁	20	25	25	30	30	20	25	25	30	30
H	80	80	80	80	80	80	80	80	80	80
M/ISO clamp	21	21	21	21	21	-	-	-	-	-
M/DIN clamp	-	-	-	-	-	21	21	28	28	28
M/DIN male	-	-	-	-	-	22	23	25	25	30
M/SMS male	20	20	24	24	35	-	-	-	-	-
Weight (kg) - Shut-off valve	2.1	2.9	4.0	5.4	8.2	2.2	2.9	4.1	5.9	8.1




Fig. 4. Dimensions

Materials

Product wetted steel parts: 1.4404 (316L)
(internal Ra < 0.8 µm)
Other steel parts 1.4301 (304)
Plug seal: EPDM
Other product wetted seals EPDM (standard)

Technical data

Max product pressure: 1000 kPa (10 bar).
Min. product pressure: Full vacuum.
Temperature range: -10°C to +140°C (EPDM).

Options

- A. Male parts or clamp liners in accordance with required standard.
- B. Product wetted seals in HNBR or FPM.
- C. Plug seal HNBR, FPM or TR2 plug (floating PTFE design - only for Manual Operated Valve).
- D. External surface finish bright.

Ordering

Please state the following when ordering:

- Connections if not welding ends.
- Size.
- Valve body combination.
- Options.

Note

For further details, see instruction ESE00307.

How to contact Alfa Laval

Contact details for all countries
are continually updated on our website.
Please visit www.alfalaval.com to
access the information direct.